






CONFIGURATIONS:	Combined, single swing and 2-Panel folding door system
TYPICAL HEIGHT:	90" (Std); 96" Max.
TYPICAL WIDTH:	84" to 120", with 36", 42" or 48" swing panel
HEADER SIZE:	1 3/4" Nominal Height
BREAKOUT:	Full Breakout, Any Position
JAMB DIMENSION:	4 1/2" x 1 3/4"
CLEAR DOOR OPENING:	63 3/4" to 99 3/4"
BREAKOUT OPENING:	Issue here to work out with Dan/Vito
SUPPORTED GLAZING:	1/4" (Std); 5/8", 1/2", 1" Insulated supported
STILES:	Narrow
BOTTOM RAILS:	4" (Std), 6", 8", 10", 12", other custom
FINISHES:	Anodized, PVDF Paint, Anti-Microbial (Touch Points or All)
HARDWARE OPTIONS:	Single/Multi-Point Locking
LISTINGS:	None
RATINGS:	None
CODES AND STANDARDS:	Egress Provisions: NFPA 101

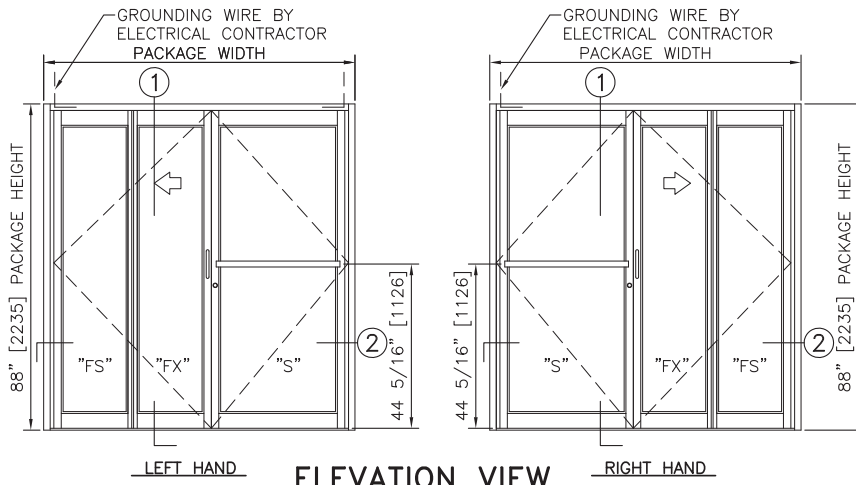


SCALE: 3/8" = 1'-0"

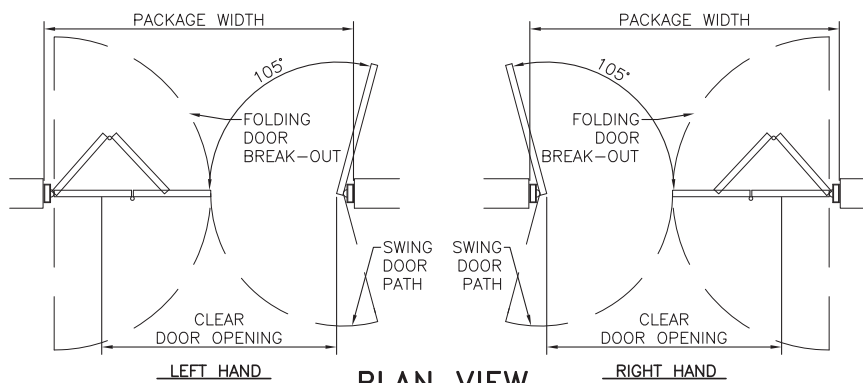

SCALE: 3/8" = 1'-0"

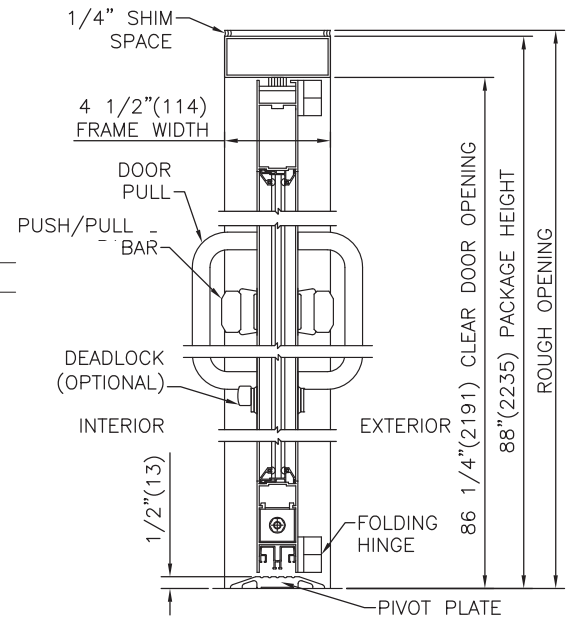

SCALE: 2" = 1'-0"

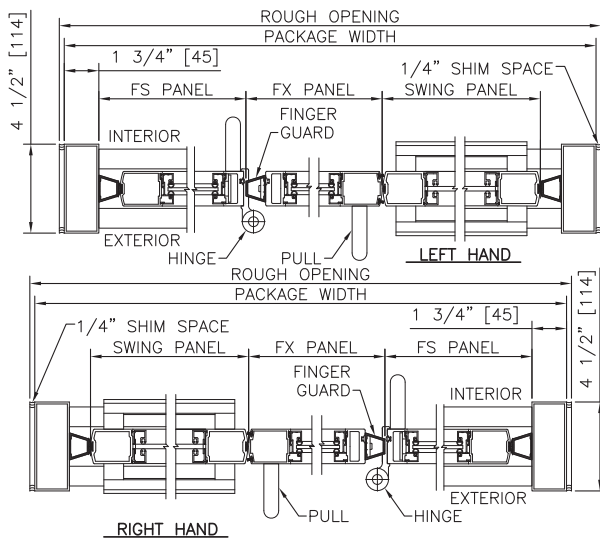

SCALE: 2" = 1'-0"

TYPICAL PACKAGE DIMENSIONS		
PACKAGE WIDTH	NOMINAL CLEAR DOOR OPENING	SWING DOOR PANEL OPTIONS
84"	63.8"	36", 42", 48"
96"	75.8"	36", 42", 48"
108"	87.8"	42", 48"
120"	99.8"	48"

- NOTES
1. PACKAGE SHALL BE GROUNDED TO BUILDING GROUND SYSTEM. GROUNDING WIRE BY ELECTRICAL CONTRACTOR.
 2. ROUGH OPENING SHALL PROVIDE 1/4"[6] SHIM SPACE ON SIDES AND TOP OF PACKAGE.
 3. STANDARD PACKAGE HEIGHT SHOWN, PACKAGE HEIGHTS TO 96"[2438] AVAILABLE.
 4. STANDARD PACKAGE EXCLUDES LOCKING; 1-POINT LOCKING AVAILABLE.
 5. FOLD-IN PACKAGE SHOWN; FOLD-OUT AVAILABLE.
 6. GLAZING STOPS FOR ALL PANELS ARE 1/4"[6].
 7. STANDARD BOTTOM RAILS ARE SHOWN; BOTTOM RAILS TO 12"[305], AND MUNTINS 2"[51] AND 4 1/4"[108] AVAILABLE.

7600 FORMULAS
CLEAR DOOR OPENING = PACKAGE WIDTH - 20.3"