



Stanley Access Technologies

International All Glass Non-Breakout Sliding Door

- All Glass, Non-Breakout
- Bi-Parting and Single Sliding Solutions
- Surface Applied, Flush Mounted
- Slim Line Top Shoe
- New Floor-Mounted Bottom Guide

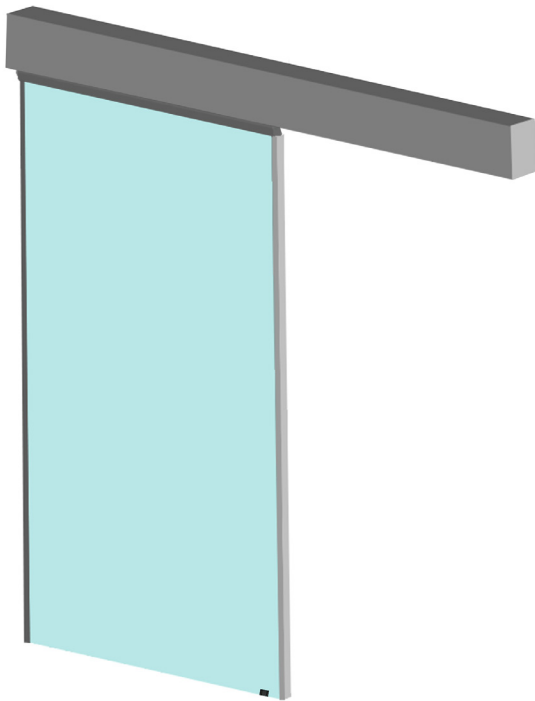

Single Sliding Door

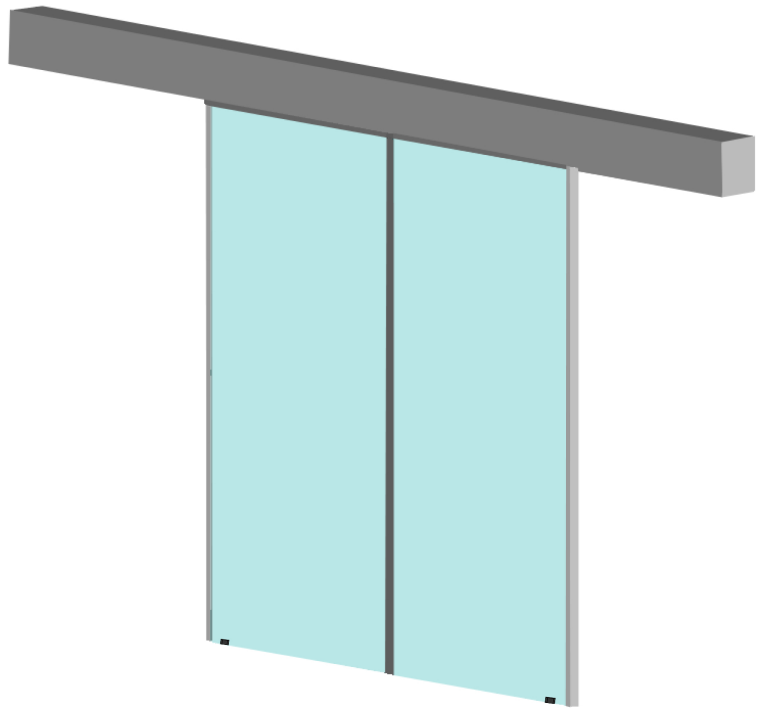

Bi-Parting Doors

**ELEGANT NEW ALL GLASS DESIGN DEVELOPED EXCLUSIVELY
FOR THE INTERNATIONAL MARKET**

OPTIONAL EQUIPMENT


- Locking Arrangements
- Auxiliary Power Offerings
- Activation and Safety Solutions

Stanley Access Technologies - the safest, most cost effective solutions available today.


Stanley Access Technologies

International All Glass Non-Breakout Sliding Door

Elevation Views Viewed From Interior

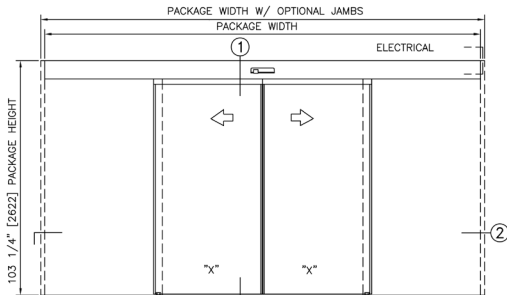


Bi-Part Elevation View

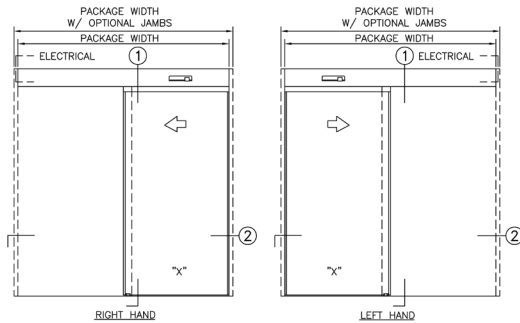


Single Slide Elevation View

Plan View

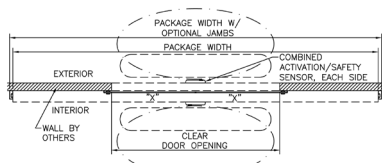

Bi-Part Plan View

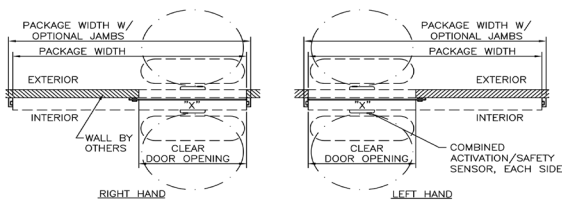


Single Slide Plan View

Product Specifications

Description	Standard Configuration	Optional Configuration
Configuration	Single Slide or Bi-Part	
Finish	Clear	Dark Bronze or Special Finish
Jamb Dimension	No Jambes	4.50" (114 mm) x 1.75" (44 mm) 6" (152 mm) x 1.75" (44 mm)
Header Dimension	8" (203 mm) h x 6" (152 mm) w	
Package Height Typical	103.25" (2622 mm)	
Clear Door Opening (CDO) Height Typical	94.50" (2400 mm)	
Package Width, Single Slide	84" (2134 mm) to 149.40" (3794 mm)	
Clear Door Opening (CDO) Width, Single Slide	38.20" (970 mm) to 70.90" (1800 mm)	
Package Width, Bi-Parting	120" (3048 mm) to 216" (5486 mm)	
Clear Door Opening (CDO) Width, Bi-Parting	52.40 (1330 mm) to 100.40" (2550 mm)	
Weight Limit Per Panel, Single Slide	330 lbs. (150 kg)	
Weight Limit Per Panel, Bi-Parting	220 lbs. (100 kg)	
Glass Thickness	12 mm (.47") 10 mm (.39")	.50" (12.7 mm) .38" (9.5 mm)
Sensors	None	2 X-Zones or 2 X-Zones & 2 Beams
Electric Locking	None	Fail Safe or Fail Secure
Voltage	220 VAC, 50/60 Hz	110 VAC, 50 /60 Hz
Auxiliary Power	None	Fly Open Box or Uninterrupted Power Supply
Switches	Power & 3-way Rocker	Power & 3-way Rotary or Keyed Rotary

Vertical Section

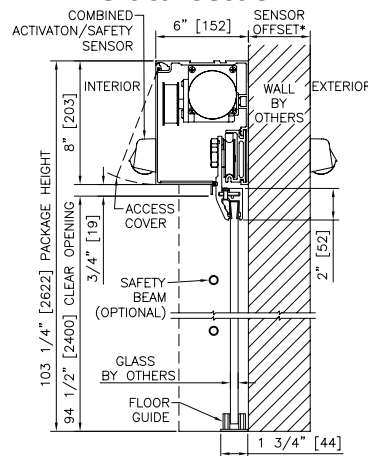

Bi-Part and Single Slide Vertical Section

Typical Package

Dimensions (WITHOUT OPTIONAL JAMBS)


Package Width	Nominal Clear Door Opening	Door Panel Nominal Width
84.0" (2134)	38.2" (970)	42.1" (1068)
96.0" (2438)	44.2" (1122)	48.1" (1221)
108.0" (2743)	50.2" (1275)	54.1" (1373)
125.7" (3194)	59.1" (1500)	62.9" (1598)
149.4" (3794)	70.9" (1800)	74.7" (1898)

Single Slide Typical Package Dimensions


Package Width	Nominal Clear Door Opening	Door Panel Nominal Width
120.0" (3048)	52.4" (1330)	30.1" (764)
144.0" (3658)	64.4" (1635)	36.1" (916)
168.0" (4367)	76.4" (1940)	42.1" (1068)
192.0" (4877)	88.4" (2245)	48.1" (1221)
216.0" (5486)	100.4" (2550)	54.1" (1373)

Bi-Part Typical Package Dimensions

Horizontal Sections

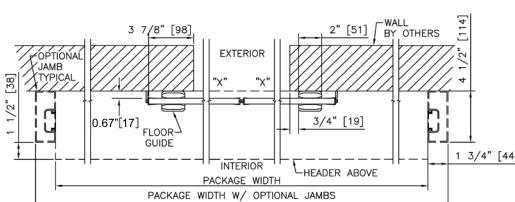

Bi-Part Horizontal Section

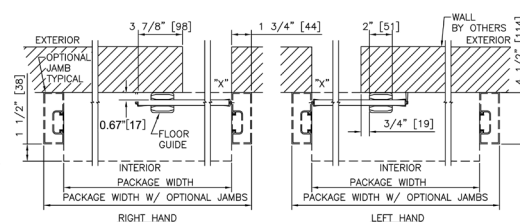

Single Slide Horizontal Section