

SLIDING AUTOMATIC ENTRANCES: ACCESS CONTROL OPTIONS DURA-GLIDE™ 5200/5300


1.61 - ACCESS CONTROL OPTIONS

- 1.61.01 - 5200 ACCESS CONTROL OPTIONS
- 1.61.02 - 5300 ACCESS CONTROL OPTIONS




DURA-GLIDE 5000 SERIES


ACCESS CONTROL OPTIONS	
PROJECT INFORMATION	
PROJECT NAME:	
LOCATION:	
DOOR NUMBER(S):	
DATE:	SHEET: OF

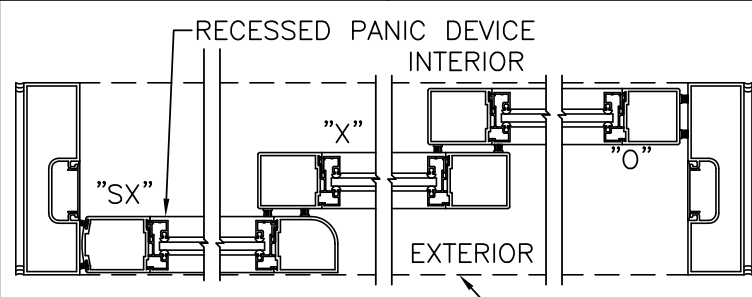


② HORIZONTAL SECTION
SCALE: 2" = 1'-0"

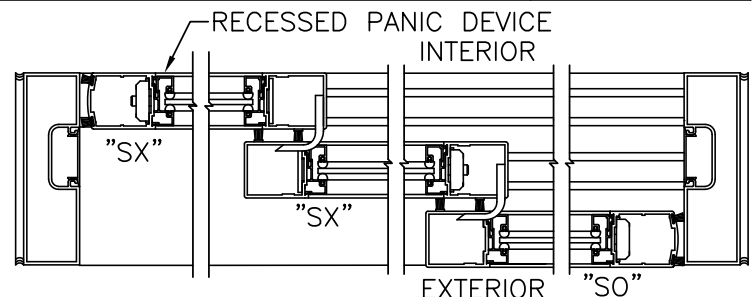


② HORIZONTAL SECTION
SCALE: 2" = 1'-0"

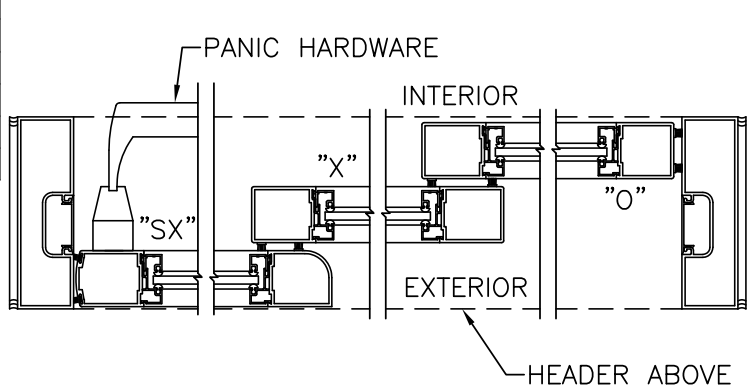

② HORIZONTAL SECTION
SCALE: 2" = 1'-0"

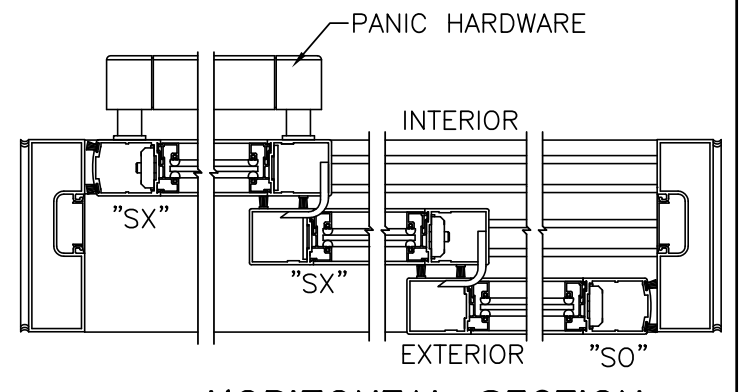


② HORIZONTAL SECTION
SCALE: 2" = 1'-0"

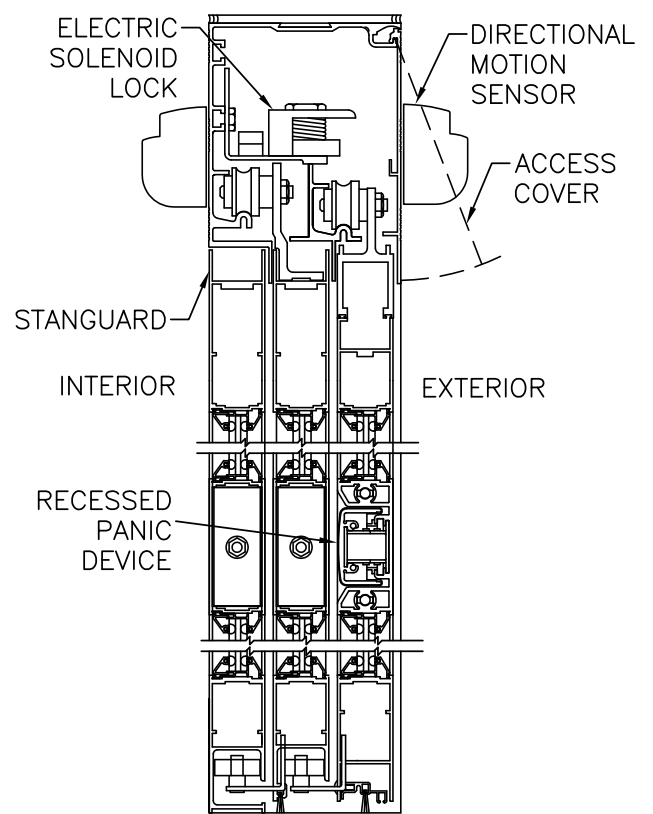


① VERTICAL SECTION
SCALE: 2" = 1'-0"

DURA-GLIDE 5200
ACCESS CONTROL WITH SOLENOID LOCK AND RECESSED PANIC DEVICE

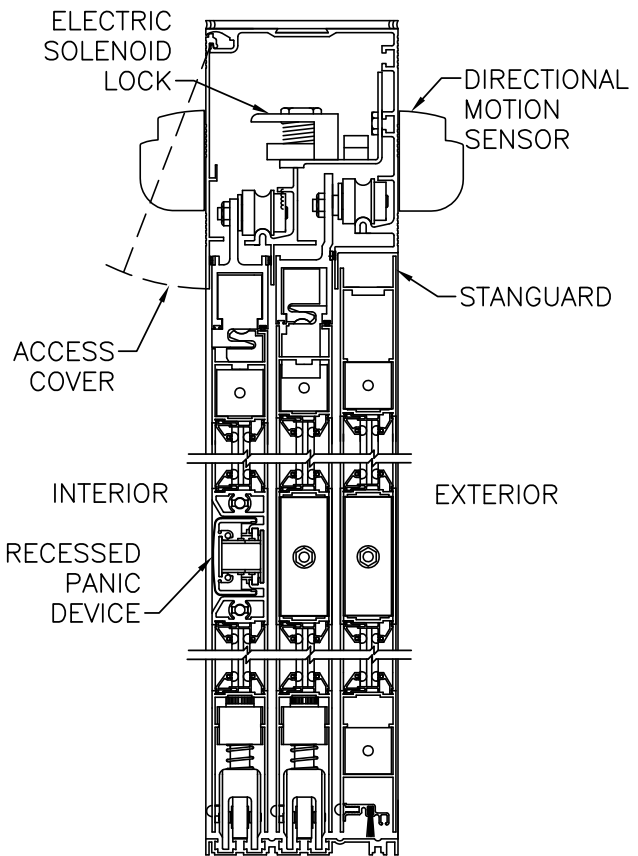


① VERTICAL SECTION
SCALE: 2" = 1'-0"

DURA-GLIDE 5300
ACCESS CONTROL WITH SOLENOID LOCK AND RECESSED PANIC DEVICE

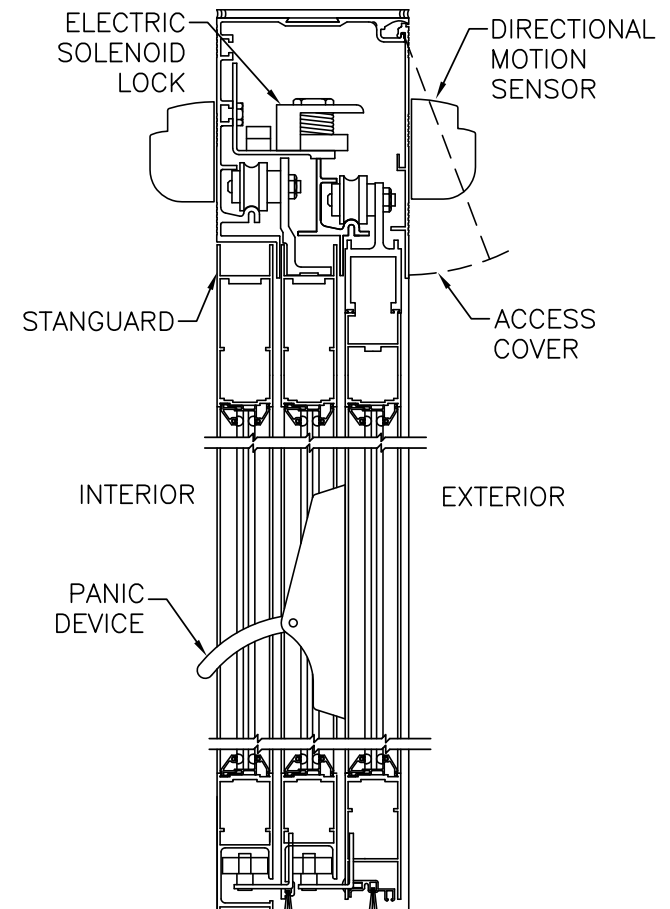

① VERTICAL SECTION
SCALE: 2" = 1'-0"

DURA-GLIDE 5200
ACCESS CONTROL WITH SOLENOID LOCK AND SURFACE PANIC DEVICE (PADDLE)

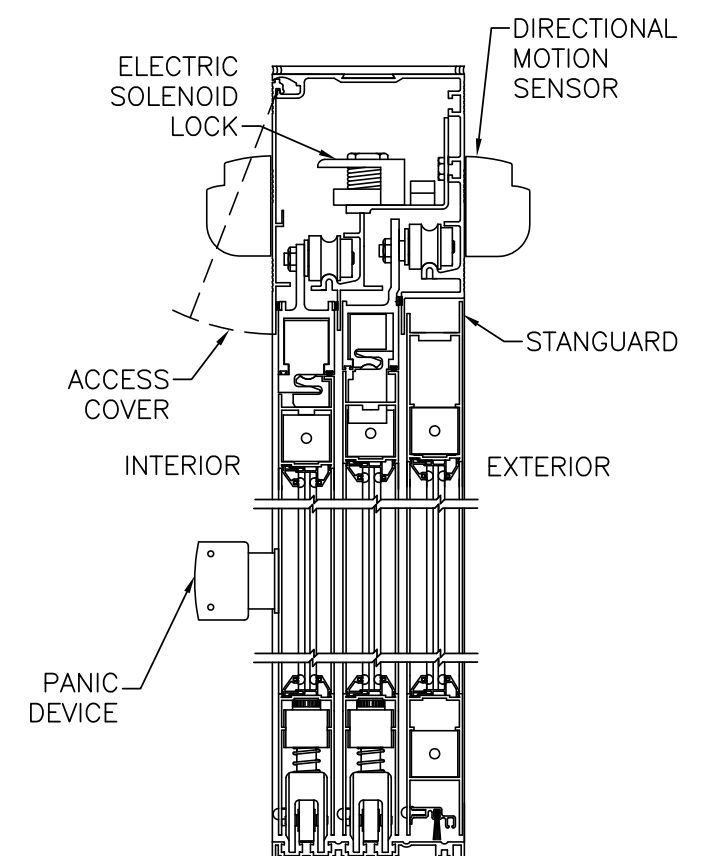

① VERTICAL SECTION
SCALE: 2" = 1'-0"


DURA-GLIDE 5300
ACCESS CONTROL WITH SOLENOID LOCK AND SURFACE PANIC DEVICE (BAR)

NOTES


- STANDARD ACCESS CONTROL SYSTEM INCLUDES ELECTRIC SOLENOID LOCK AND PANIC DEVICE; ELECTRIC SOLENOID LOCK MAY BE USED "STAND ALONE" WITHOUT PANIC DEVICE. CONSULT MANUFACTURER FOR SUGGESTED SUPPLEMENTAL LOCKING.
- HORIZONTAL SECTIONS SHOW 3-PANEL SYSTEMS ONLY; 6-PANEL SYSTEMS UTILIZE SAME COMPONENTS IN TWO SLIDING PANELS.
- ELECTRIC SOLENOID LOCK MAY BE FAIL SAFE OR FAIL SECURE.
- SEE SPECIFICATIONS FOR ADDITIONAL INFORMATION.

ACCESS CONTROL OPTIONS	
DURA-GLIDE 5000 SERIES	STANLEY Security ACCESS TECHNOLOGIES

DURA-GLIDE
5200
SERIES

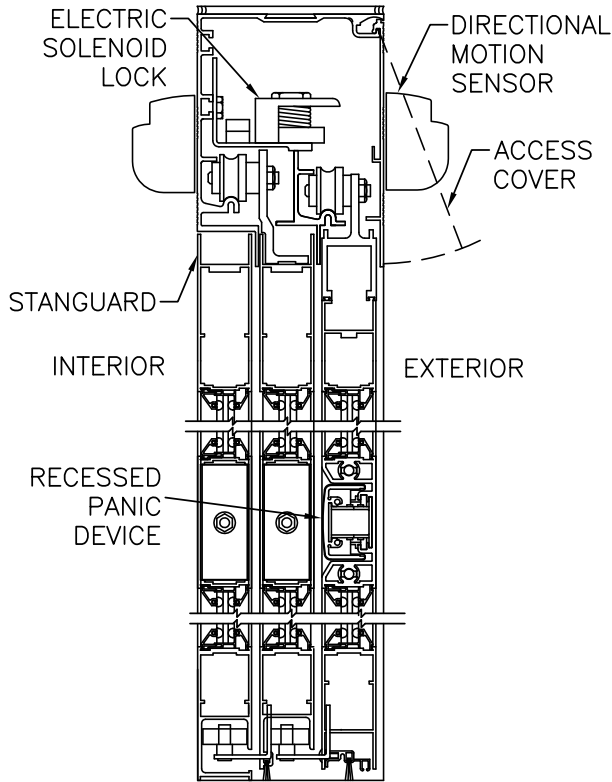


① VERTICAL SECTION

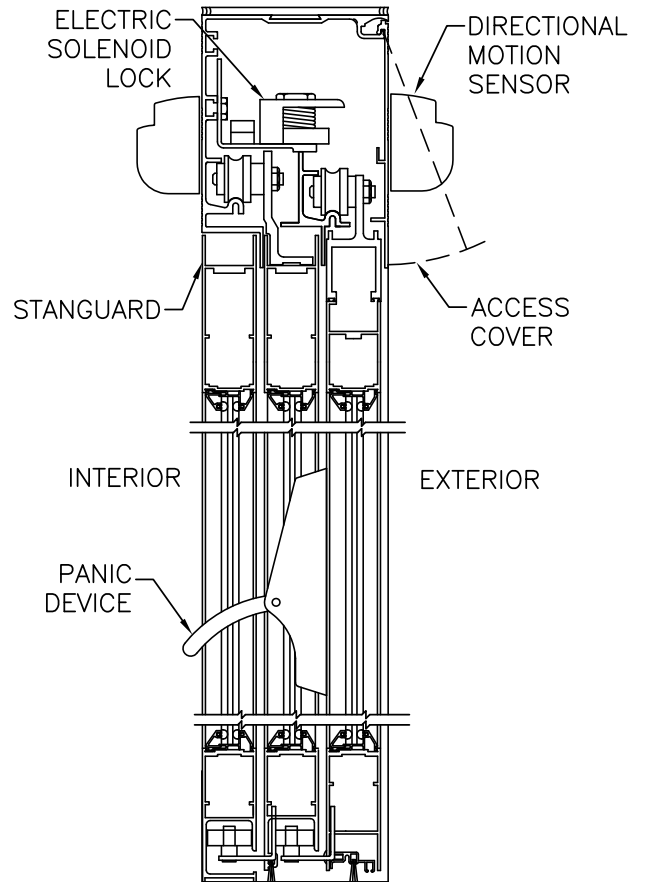


① VERTICAL SECTION

NOTES

1. STANDARD ACCESS CONTROL SYSTEM INCLUDES ELECTRIC SOLENOID LOCK AND PANIC DEVICE; ELECTRIC SOLENOID LOCK MAY BE USED "STAND ALONE" WITHOUT PANIC DEVICE. CONSULT MANUFACTURER FOR SUGGESTED SUPPLEMENTAL LOCKING.
2. HORIZONTAL SECTIONS SHOW SINGLE SLIDE ONLY; BI-PART SYSTEMS UTILIZE SAME COMPONENTS IN TWO SLIDING PANELS.
2. ELECTRIC SOLENOID LOCK MAY BE FAIL SAFE OR FAIL SECURE.
3. SEE SPECIFICATIONS FOR ADDITIONAL INFORMATION.

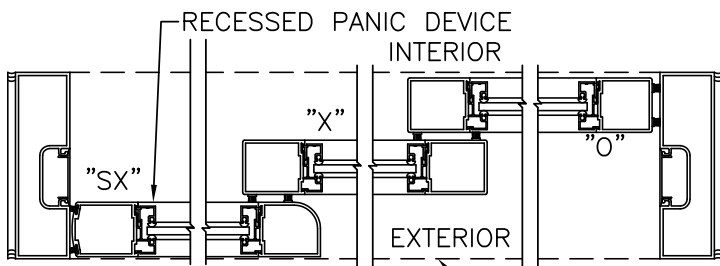


② HORIZONTAL SECTION

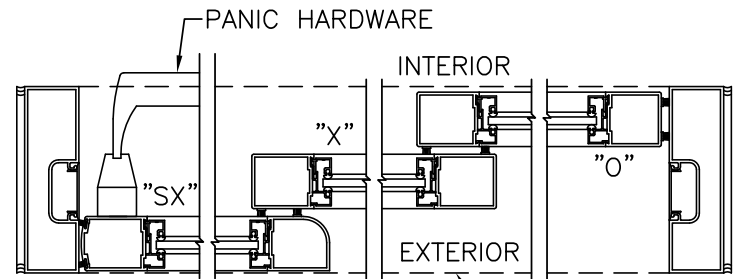


② HORIZONTAL SECTION

DURA-GLIDE
5300
SERIES

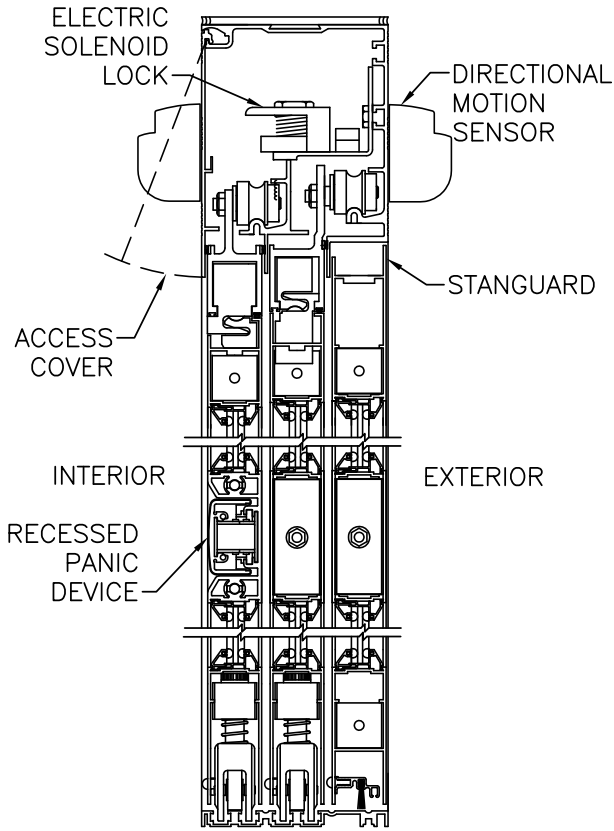


① VERTICAL SECTION

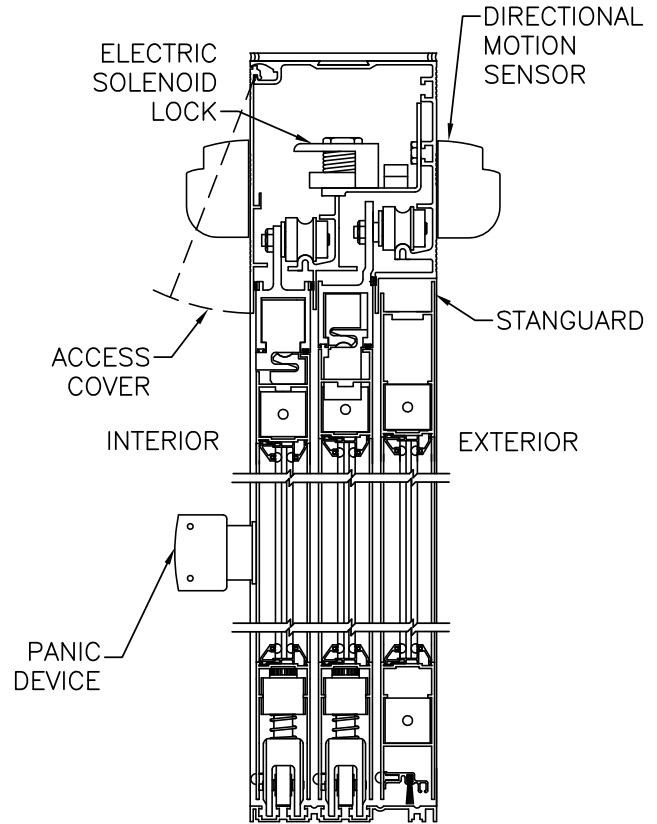


① VERTICAL SECTION

NOTES

1. STANDARD ACCESS CONTROL SYSTEM INCLUDES ELECTRIC SOLENOID LOCK AND PANIC DEVICE; ELECTRIC SOLENOID LOCK MAY BE USED "STAND ALONE" WITHOUT PANIC DEVICE. CONSULT MANUFACTURER FOR SUGGESTED SUPPLEMENTAL LOCKING.
2. HORIZONTAL SECTIONS SHOW SINGLE SLIDE ONLY; BI-PART SYSTEMS UTILIZE SAME COMPONENTS IN TWO SLIDING PANELS.
2. ELECTRIC SOLENOID LOCK MAY BE FAIL SAFE OR FAIL SECURE.
3. SEE SPECIFICATIONS FOR ADDITIONAL INFORMATION.

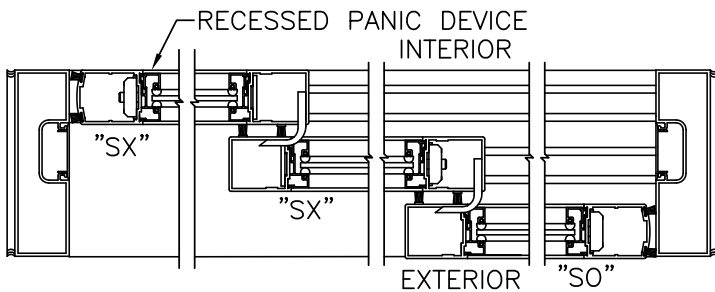

② HORIZONTAL SECTION

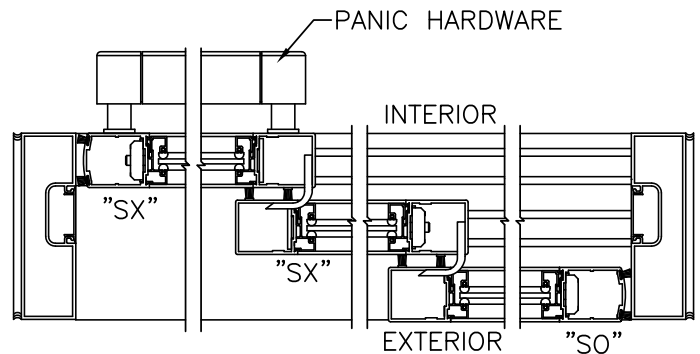

② HORIZONTAL SECTION